

## Fitting Instruction Roof Console

### ❗ IMPORTANT ❗

The mounting of the roof console needs a bit of practice. It is more complicated than it looks like. Some parts of the roof liner will be reused and have to be handled carefully. It could be that the wiring of the rear interior lighting has to be extended.

These components have to be removed first:


- Rear interior lighting. No screws, holds very tight. Careful!
- Plastic clip (plug) in front of the rear interior light.
- Front plastic cover with the integrated sunglass compartment. This part will be integrated into the roof console. No screws, holds very tight. Careful!




The rear plastic clip will be changed with the new type of plastic plug.



These two clips have to be removed from the inner part of the roof liner.

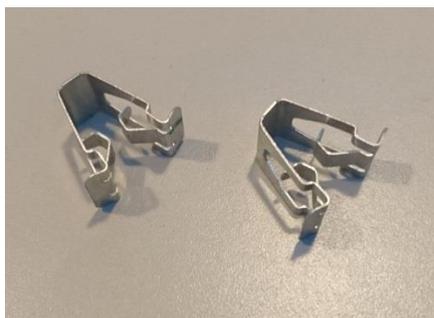

....and will be reused on the marked position below.

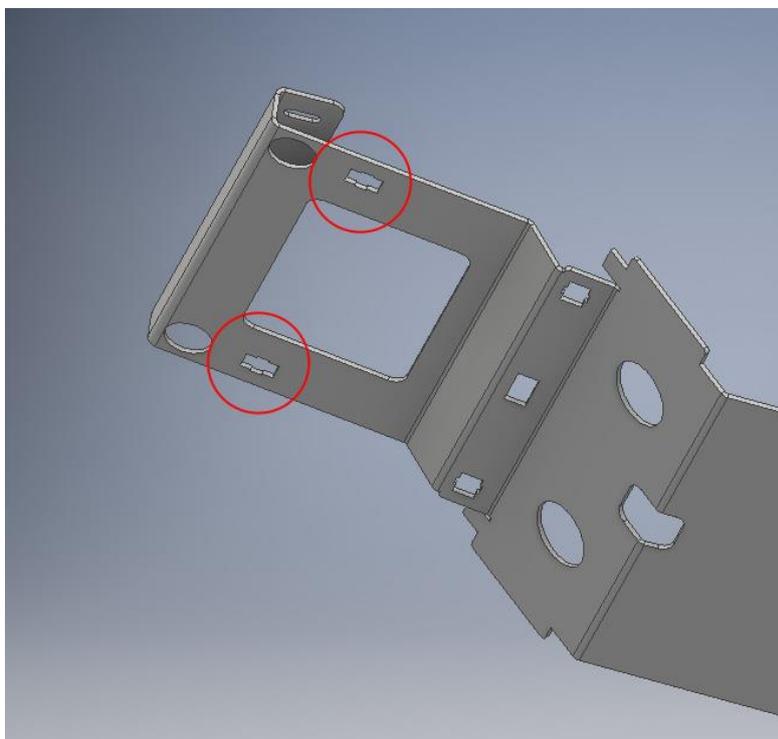

## Assembling:

Partially assembling of the first parts before mounting the roof console:

- \* Roof console with 2 compartments: Part number 2 will be attached to part number 1.
- \*\* Roof console wit DIN cut-out: Part number 2 does not exist.
- Part number 3 will be attached.

## Mounting:

The combination of the parts number 1 to 3 can now be mounted.

- In the former place where the metal clips have been removed. The slot nuts will find the place to mount the front part of the console.
- In the rear section, the plastic plug will be used to mount the console.

It is very important to insure that they are seated securely and tightened down completely.

## Further steps:

After the mounting of the first section it could happen that a small deformation of the roof liner around the former cut-out of the interior light occurs. In that case, you can use part number 6 and 7 to bring the roof liner back to the original shape.

Insert the small tube (part number 5) in to the indicated holes.

Snap-in the original plastic part into the metal clips in part number 3.

Part number 9 will be attached into part number 10. The part will find the exact position during the mounting itself.

The cover (part number 10) has to be placed first on the backside of the part number 1.

During the fold up, the position of all components have to be double checked.


If everything is on the right position, the cover should snap-in at the front.

Screw in the screws from both sides into part number 5.

Prepare the wiring for the interior light. Part number 11 can be attached. It covers the wiring and the mounting parts.

Finally, part number 12 can be mounted. The wiring can be plugged in and the lamp can be remounted. We recommend removing the cover glasses of the lamp to ensure the perfect fitment for this part.



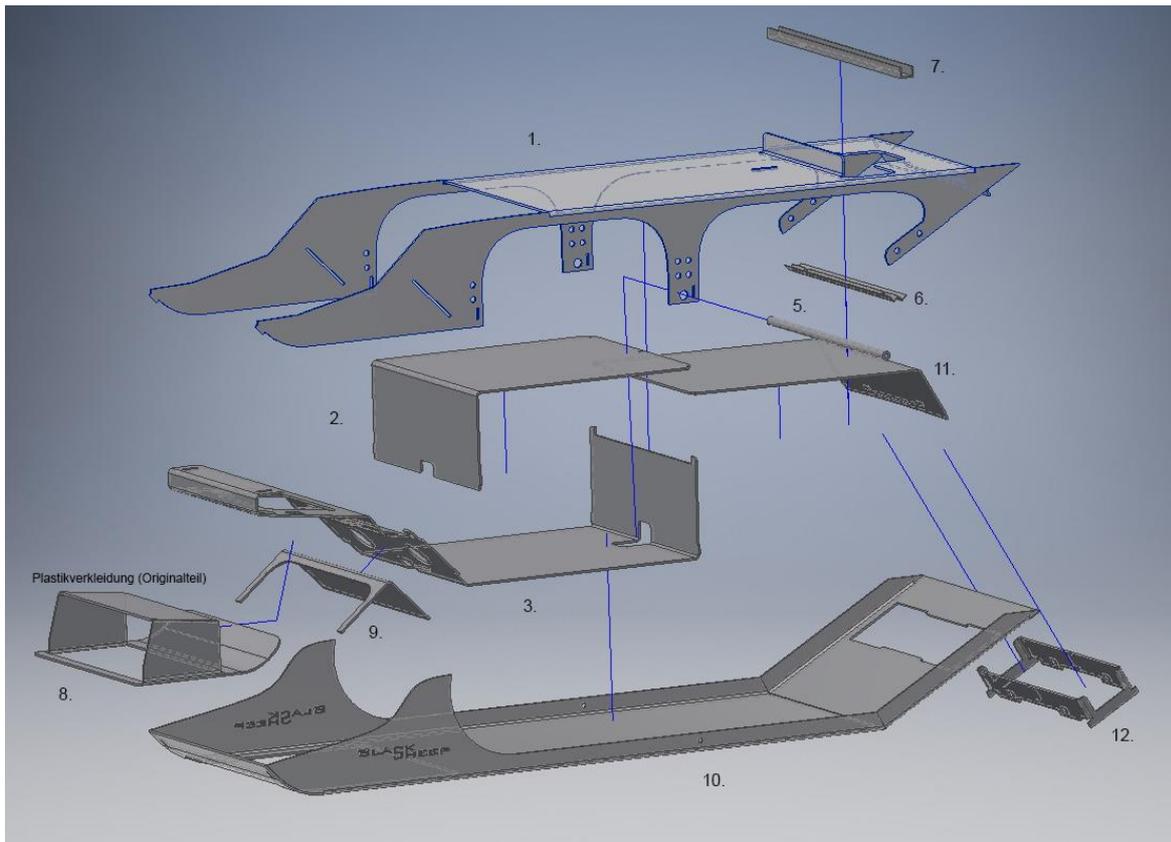

\* Exploded-view drawing (2-compartment-version) and correct order of assembling.

\*\* Version with DIN cut-out without part number 2.



Position of part number 6 and 7.



Assembling of part number 12.



If you plan to add our overhead switch panel or to install some led lighting, we recommend drilling some holes into the original plastic part. The installation might be easier.

Status November 2016

